

Hydrophone TC4034

Ultra Broadband Spherical Hydrophone



The TC4034 broadband spherical hydrophone provides uniform omnidirectional characteristics over a wide frequency range of 1Hz to 480kHz.

The overall receiving characteristics makes the TC4034 an ideal transducer for making absolute underwater sound measurements up to 480kHz. The wide frequency range also makes the TC4034 perfect for calibration purposes, particularly in higher frequencies.

NBR means Nitrile Rubber

The NBR rubber is first of all resistant to sea and fresh water but also resistant to oil. It is limited resistant to petrol, limited resistant to most acids and will be destroyed by base, strong acids, halogenated hydrocarbons (carbon tetrachloride, trichloroethylene), nitro hydrocarbons (nitrobenzene, aniline), phosphate ester hydraulic fluids, Ketones (MEK, acetone), Ozone and automotive brake fluid.

TECHNICAL SPECIFICATIONS

Usable frequency range:	1Hz to 470kHz (typical +5/-13dB)
Linear frequency range:	1Hz to 250kHz (+2, -4dB)
Receiving sensitivity:	(re 1V/μPa) -218dB ±3dB (at 250Hz)
Horizontal directivity:	Omnidirectional ±2dB (at 100 kHz)
Transmitting sensitivity:	122dB ±3dB (typical) re 1μPa/V at 1m at 100kHz
Vertical directivity:	>270° ±3dB (at 300kHz)
Nominal capacitance:	3nF
Operating depth:	900m
Survival depth:	1000m
Operating temperature range:	-2°C to +80°C
Storage temperature range:	-40°C to +80°C
Weight, incl. cable (in air):	1.6kg
Cable (length and type):	Standard 10m shielded pair DSS-2MIL-C915.
	Optional cable length available on request
Encapsulating material:	Special formulated NBR
Metal body:	Aluminum bronze - AlCu10Ni5Fe4
Connector type:	BNC



PRODUCT BENEFITS

- Omnidirectional in the full frequency range
- Longterm stability
- Extreme wide frequency range
- Durable construction
- Individually calibrated

Hydrophone TC4034

Ultra Broadband Spherical Hydrophone

Documentation:

Vertical directivity:
At 100, 200, 300kHz


Receiving sensitivity:
5 kHz to 500kHz

Transmitting sensitivity:
5 kHz to 500kHz


Horizontal directivity:
At 100, 200, 300kHz

Impedance:
5 kHz to 500kHz


Horizontal directivity pattern

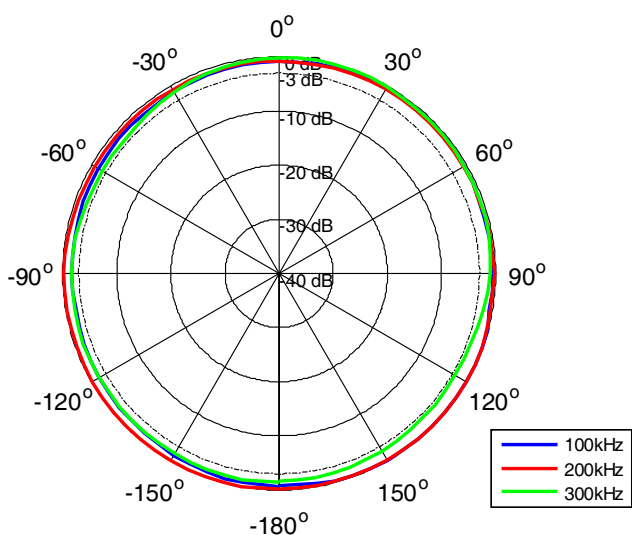


Receiving Sensitivity [dB re 1V/ μ Pa @ 1m]

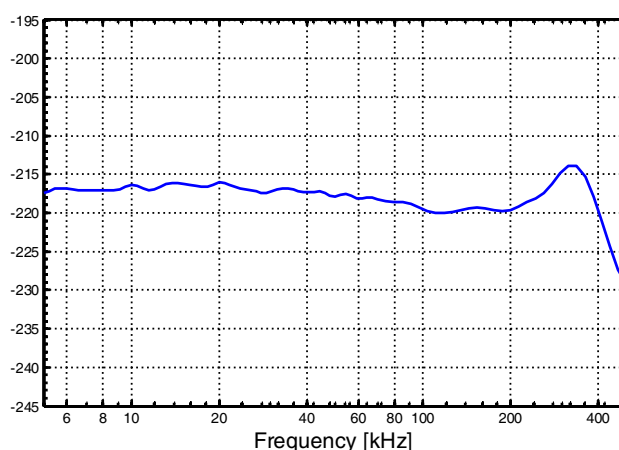

Transmitting Sensitivity [dB re 1 μ Pa/V @ 1m]

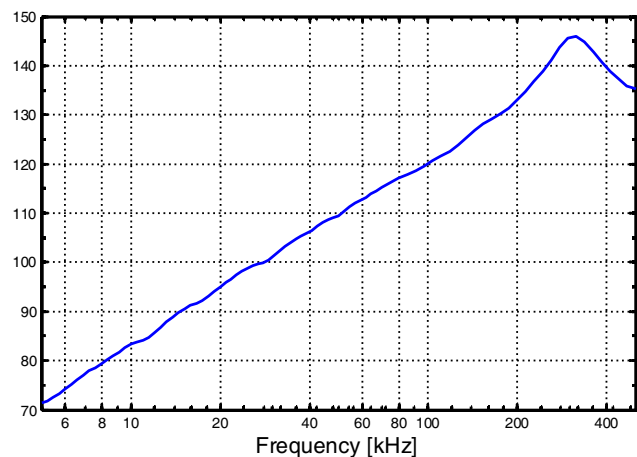

Impedance

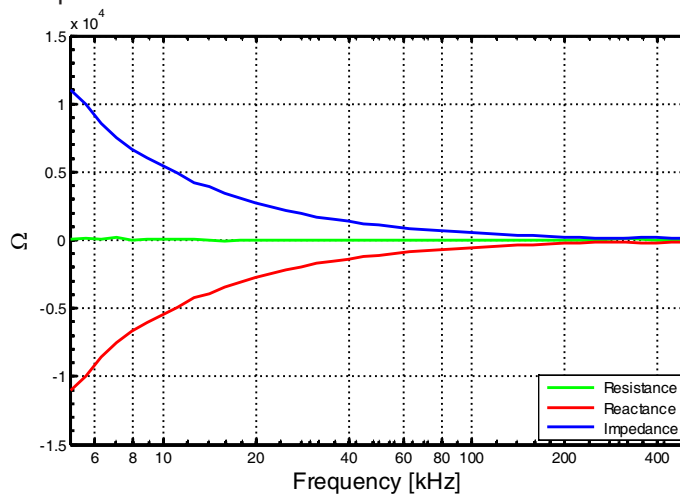

Hydrophone TC4034

Ultra Broadband Spherical Hydrophone





Documentation:

The hydrophone is permanently encapsulated in special formulated NBR to provide longterm reliability. The rubber has been specially compounded to ensure an acoustic impedance close to that of water.

The TC4034 is supplied with an integral water blocked two-conductor shielded cable, type DSS-2, which complies with Mil C915.

Electrical Diagram and Outline Dimensions

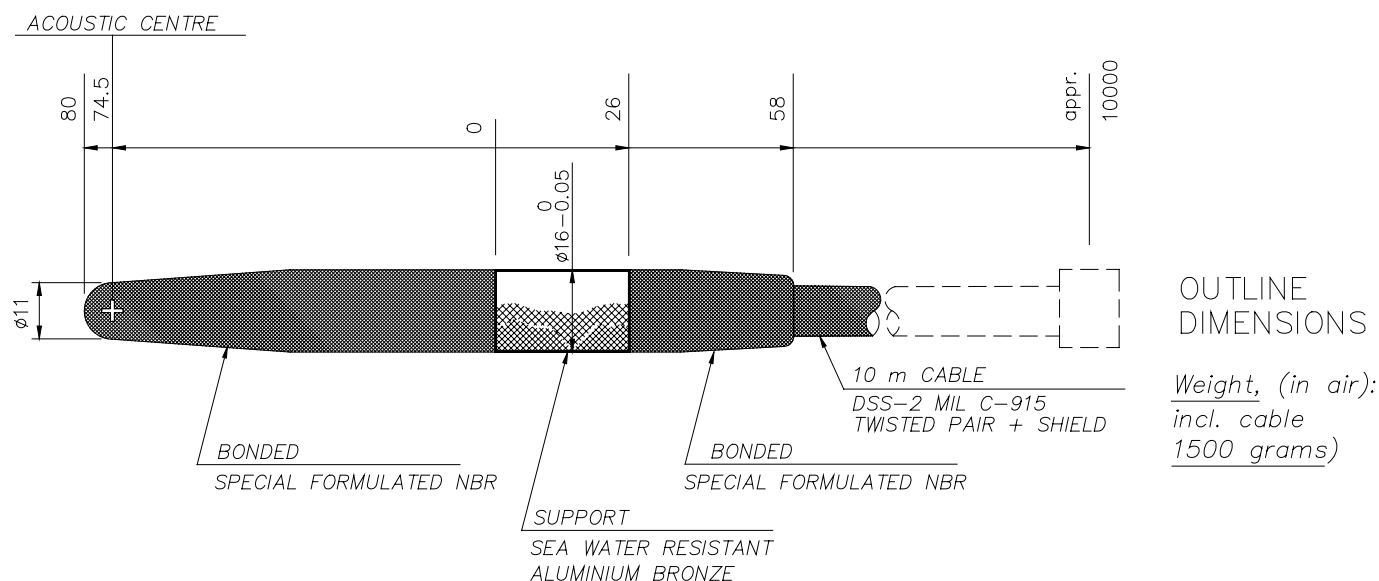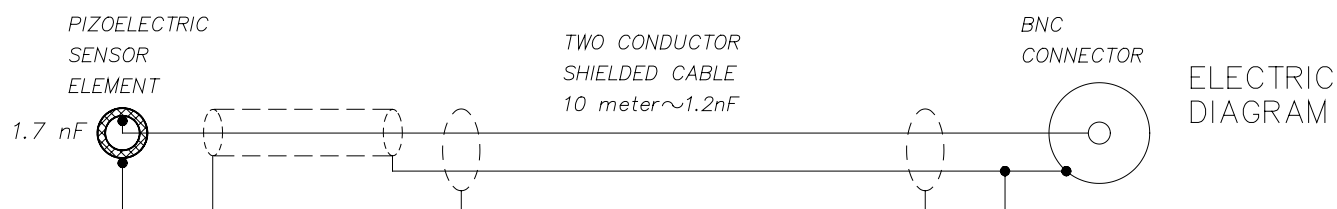

For information on export control regulations
on this product, please refer to
www.teledynemarine.com/reson



TELEDYNE MARINE
RESON
Everywhereyoulook™

www.teledynemarine.com/reson

Tel. +45 4738 0022 (Europe) • Tel: +1 805 964 6260 (USA)

Email: reson@teledyne.com